

GONIO

*Profitable flexibility for manhole bases,
manholes and concrete pipes.*

BFS



Flexibility and profitability in a modular system.

Only one machine is able to cover the full product range.

Whether you start with pipes or manhole units – with our modular concept manufacturing improvements can be done step by step. By expanding to a “duo” configuration the complete range of manhole bases, manholes and pipes to the highest quality can be produced.

Long-lasting, robust machine components and simple installation guarantee maximum profitability.



Manhole Base Product







Manhole vibrating unit:

*Core mounted central vibrators, optional with frequency converter **Uniflex** quick mould change system.*

Pipe vibrating unit:

*The proven BFS central vibrating unit **V230** with hydraulic clamping and regularly frequency control.*

Product Overview GONIO 1525		Inside diameter	max. lenght	Standard
	Manhole tapers	800 – 1.200 mm	1.300 mm	DIN 4034 part 1+2 internat. standards
	Manhole rings	800 – 1.500 mm	1.300 mm	DIN 4034 part 1+2 internat. standards
	base units	1.000 – 1.500 mm	1.800 mm	DIN 4034 part 1+2 internat. standards
	Pipes reinforced Pipes non-reinforced	300 – 1.500 mm	2.500 mm	DIN 4035 DIN 4032 internat. standards



GONIO 1525 duo



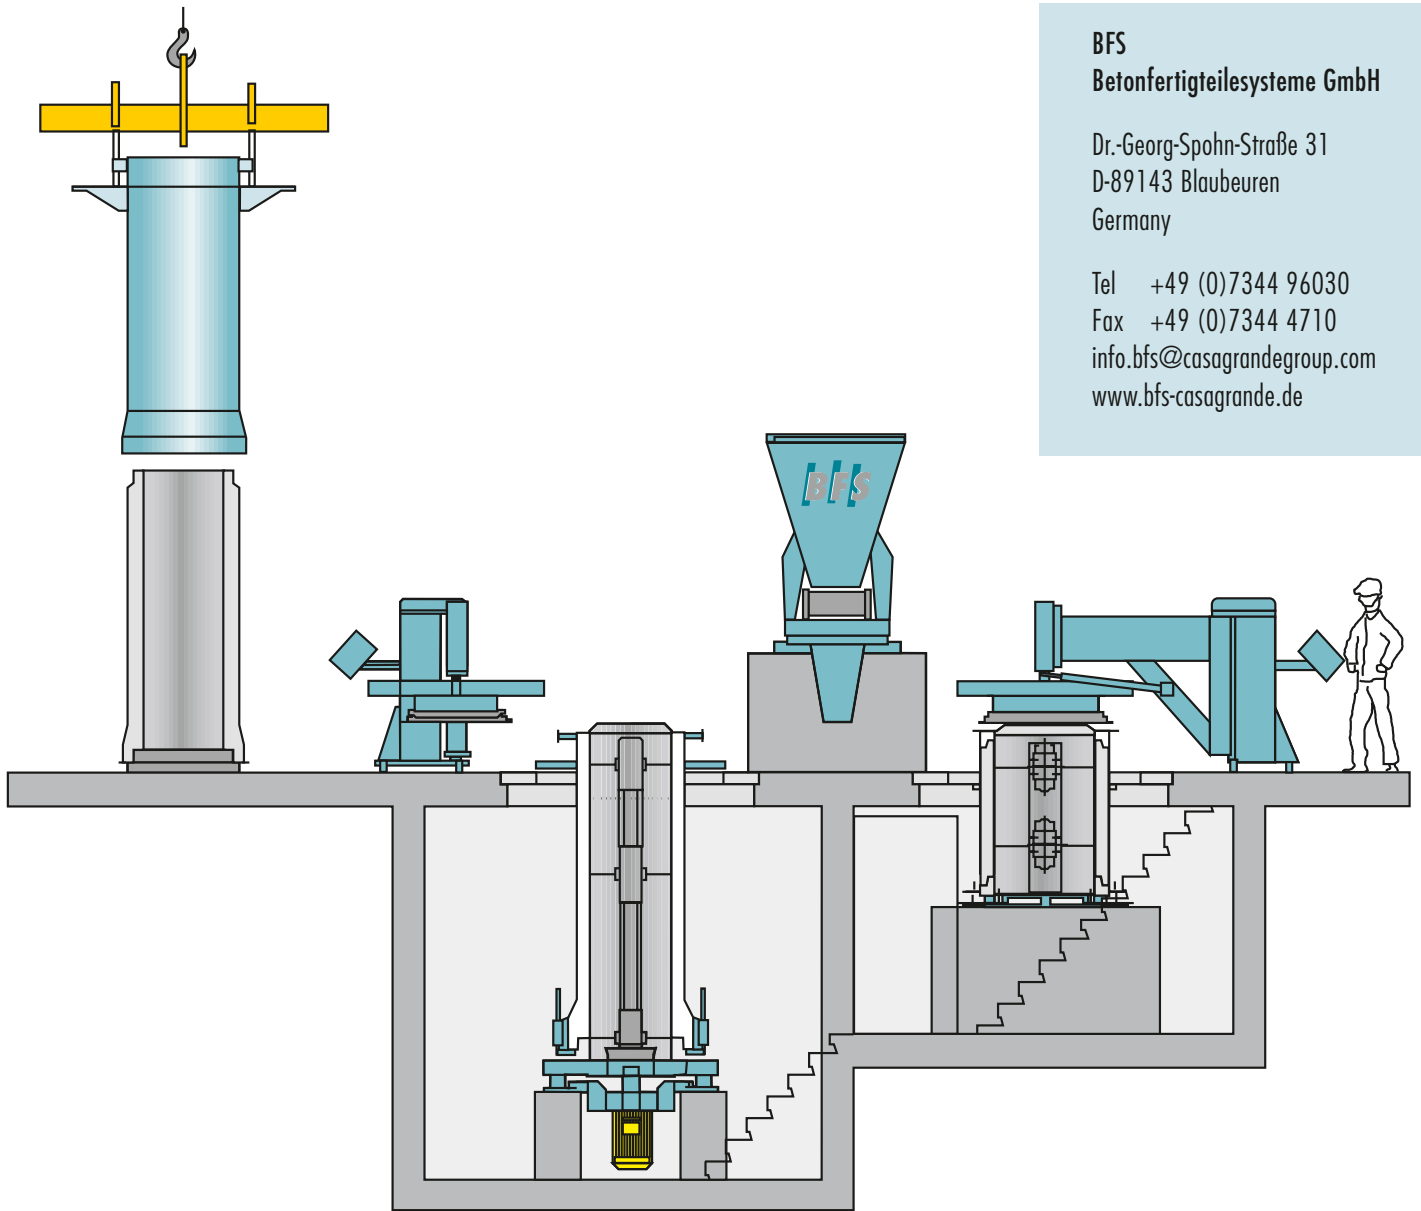
GONIO Spigot-Pressing unit



GONIO 1525 duo concrete feeding unit



GONIO 1525 duo



BFS
Betonfertigteileysteme GmbH

Dr.-Georg-Spohn-Straße 31
D-89143 Blaubeuren
Germany

Tel +49 (0)7344 96030
Fax +49 (0)7344 4710
info.bfs@casagrandegroup.com
www.bfs-casagrande.de

*Sample machinery variation
using manhole production
on right hand side and pipe
production on left hand side*



*Easy to use machine
movement control unit.*



BFS
Betonfertigteileysteme GmbH
Dr.-Georg-Spohn-Straße 31
D-89143 Blaubeuren
Germany



BFS Italy
Via A. Malignani, 1
I-33074 Fontanafredda
Pordenone
Italy